



"ADVANTEK" FRP STANDARD 12" LONG WEAR PAD

All ADVANTEK Products include the Adhesive Kits necessary for installation. (6 oz epoxy, static mixer & retaining nut)

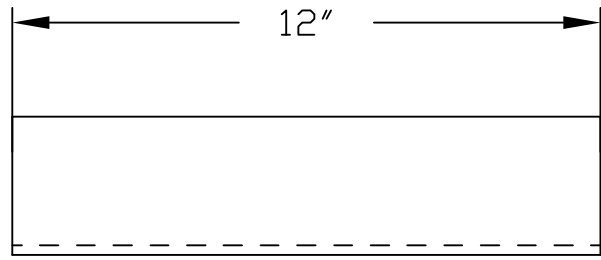

SIDE VIEW

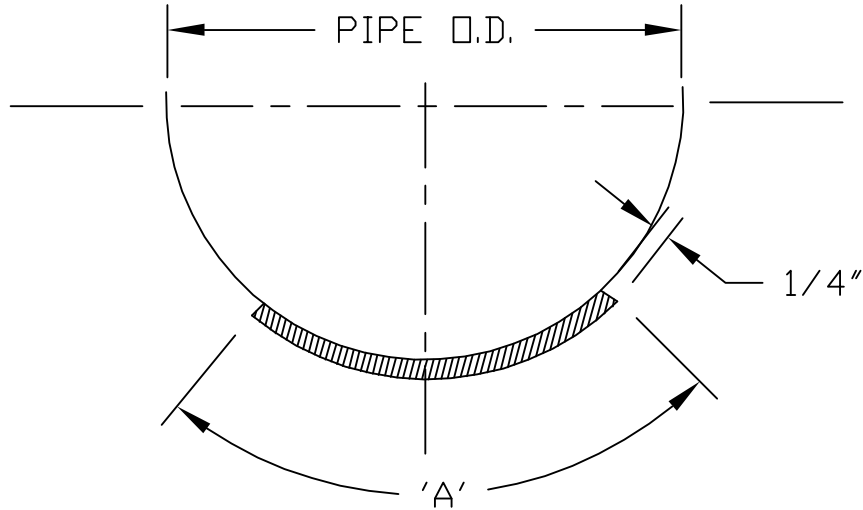

PIPE SIZES	'A'
UP TO 4"	90°
6" - 10"	60°
12" & UP	30°

ORDER BY FIG. NO. A(NPS)-12

NOTES:

1. RESIN TO BE DERAKANE 510C-350, WITH 3% ANTIMONY TRIOXIDE ADDED FOR CLASS 1 FLAME SPREAD RATING.
2. PIPE CRADLE TO BE OF ALL-MAT CONSTRUCTION & MOLDED TO FIT PIPE OUTSIDE DIAMETER.
3. INSIDE SURFACE TO BE ROUGHENED FOR BONDING TO PIPE.
4. TO BE INSTALLED USING 2 PART STRUCTURAL EPOXY, MIXING NOZZLE & EPOXY APPLICATION GUN
5. MAXIMUM OPERATING TEMPERATURE -423°F TO +350°F

REV. NO.	REVISION	BY	DATE	ADVANTEK FRP WEAR PAD	
0	ISS. FOR CUST. COMMENT	TB	09/16/05	ADVANTAGE INDUSTRIAL SOLUTIONS	
				TEL (832)237-7500 - FAX (832)237-7501	
				FIGURE NO. A-12	REV. 0